



Waxman Ceramics
Architectural Tiles



BK


series

BLOCK


unglazed porcelain stoneware
UNI EN14411
group B1a UGL




COLOURS

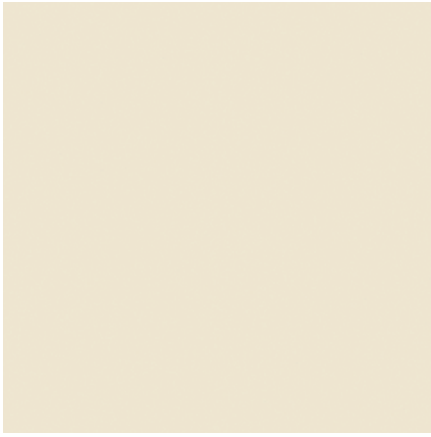

BK-70
Super White

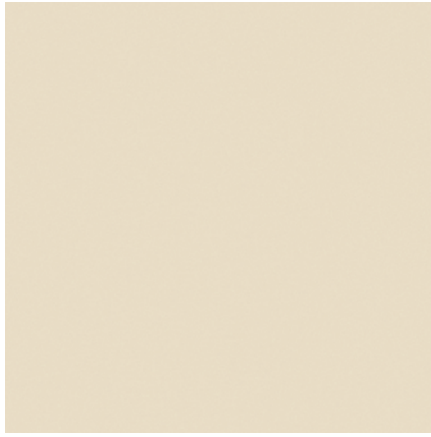

BK-71
White




BK-72
Beige




BK-73
Taupe



BK-74
Khaki

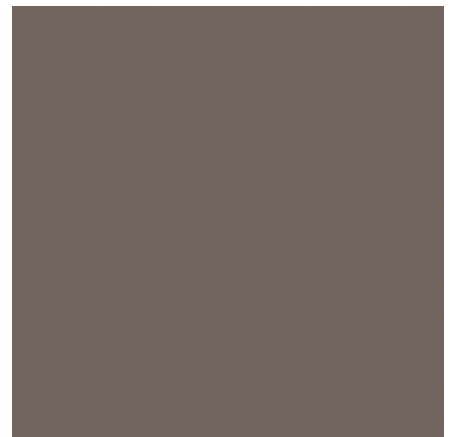

BK-75
Brown

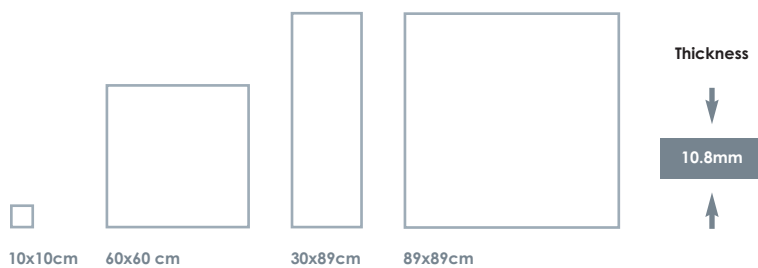

COLOURS



BK-76
Greige




BK-77
Grey



BK-79
Graphite




BK-80
Black

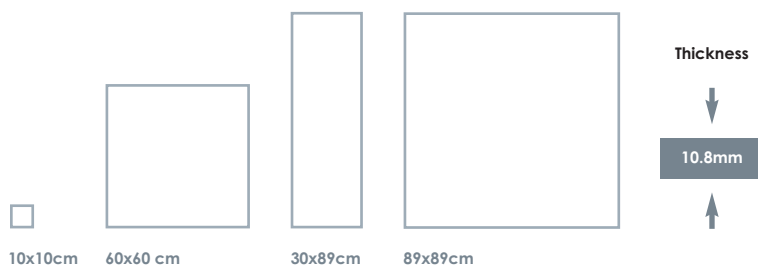


DECORATION



Strip - 4x30cm
30x30cm




Brick - 4x15cm
30x30cm

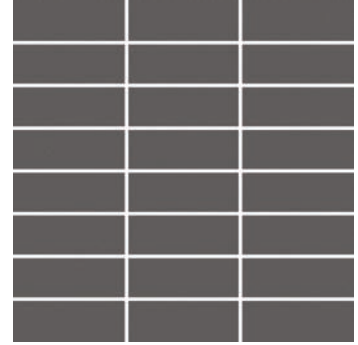


Mini Brick - 4x10cm
30x30cm



XL Strip - 4x60cm
30x60cm



FINISHES

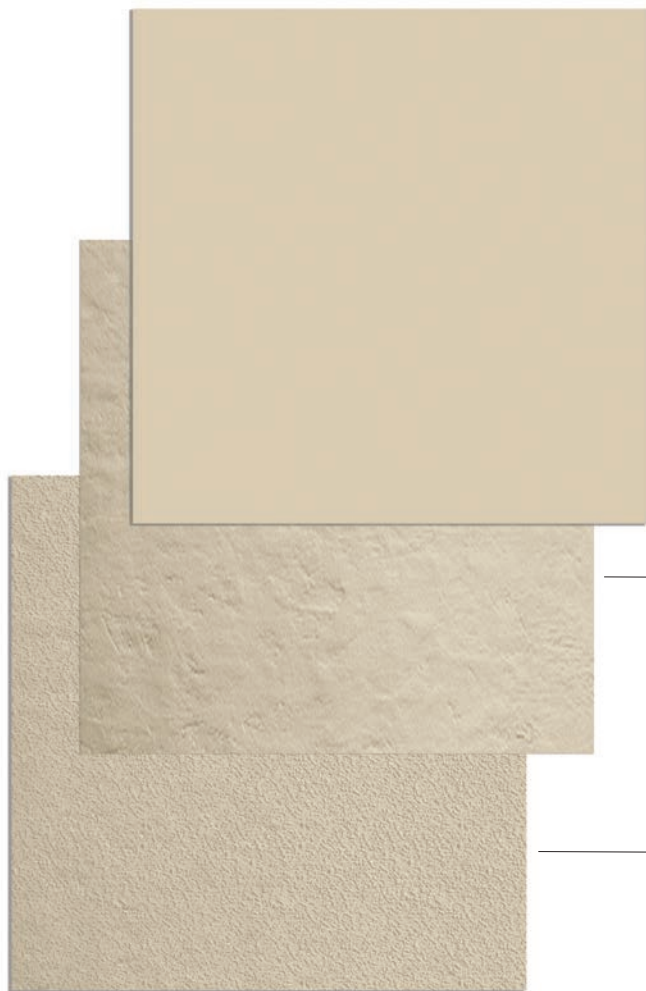

Natural

Slip Resistance		
	R9	+36
	A	

Riven

Slip Resistance		
	R10	+36
	A	

Textured

Slip Resistance		
	R12	+36
	C	+40

SPECIAL PIECES



Skirting
7x30cm, 7x60cm, 7x89cm

SIZES



SIZE		10x10cm	30x60cm	60x60cm	30x89cm	89x89cm
THICKNESS		10.8mm	10.8mm	10.8mm	10.8mm	10.8mm
BK-70	Super White	● ● ●	● ● ●	● ● ●	● ● ●	● ● ●
BK-71	White	● ● ●	● ● ●	● ● ●	● ● ●	● ● ●
BK-72	Beige	● ● ●	● ● ●	● ● ●	● ● ●	● ● ●
BK-73	Taupe	● ● ●	● ● ●	● ● ●	● ● ●	● ● ●
BK-74	Khaki	● ● ●	● ● ●	● ● ●	● ● ●	● ● ●
BK-75	Brown	● ● ●	● ● ●	● ● ●	● ● ●	● ● ●
BK-76	Greige	● ● ●	● ● ●	● ● ●	● ● ●	● ● ●
BK-77	Grey	● ● ●	● ● ●	● ● ●	● ● ●	● ● ●
BK-79	Graphite	● ● ●	● ● ●	● ● ●	● ● ●	● ● ●
BK-80	Black	● ● ●	● ● ●	● ● ●	● ● ●	● ● ●

● Natural ● Riven ● Textured













BK-72 Beige Natural - 89x89cm



Bk-78 Ash Natural - 89x89cm

TECHNICAL FEATURES

	Norm Standards	Test results
 Product Classification	UNI EN 14411-G ISO 13006	Group B1a UGL fully vitrified
 Dimensional and surface quality	UNI EN ISO 10545-2	Length + width $\pm 0,2\%$ max Thickness $\pm 3,0\%$ Linearity $\pm 0,2\%$ Wedging $\pm 0,2\%$ Warpage $\pm 0,2\%$
 Water absorption	UNI EN ISO 10545-3	0.03%
 Flexural strength	UNI EN ISO 10545-4	53N/mm ²
 Frost resistance	UNI EN ISO 10545-12	Resistant
 Resistance to acids and alkalis (except hydrofluoric acid)	UNI EN ISO 10545-13	Resistant
 Deep abrasion resistance	UNI EN ISO 10545-6	102mm ³
 Linear thermal expansion	UNI EN ISO 10545-8	$\leq 7 \times 10^{-6} / ^\circ\text{C}$
 Stain resistance	UNI EN ISO 10545-14	Class 5
 Slip resistance	DIN 51130 PTV (shod) DIN 51097 PTV (barefoot)	R9 (Natural) R10 (Riven) R12 (Textured) +36 (Natural) +36 (Riven) +36 (Textured) A (Natural) A (Riven) C (Textured) +40 (Textured)

Waxman Ceramics Architectural Tiles

Head Office **01422 377123**

Grove Mills
Elland
West Yorkshire
HX5 9DZ
England

London Office **020 7717 5565**

Email info@waxmanarchitectural.co.uk
Web www.waxmanarchitectural.co.uk

Waxman Ceramics Architectural Tiles is a division of Waxman Ceramics Ltd - Part of the Waxman Group

The information contained within this document is, to the best of our knowledge, accurate at the time of production. We reserve the right to modify this document at any time. Whilst every attempt has been made to accurately reproduce colours and textures, images used within this document are only intended as a guide. Please refer to actual product samples before specifying or ordering.

REF: 19/03