








EPD /













EX-552 Grey



EX-553 Ivory








ΕX	Ser	ies
Glazed	Porcela	in

EXMOOR

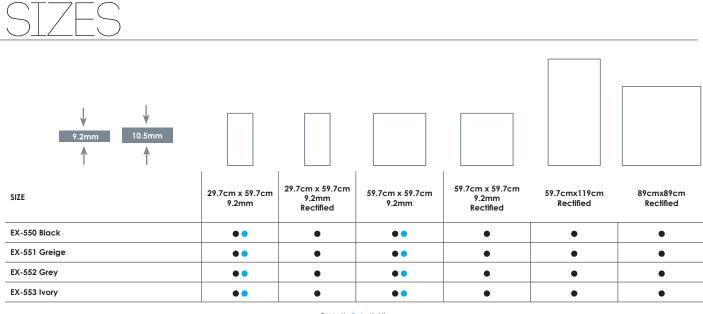

Matt Anti-Slip

FINISHES



Matt	Matt				
Slip	Resista	ince			
	R10	+36			
P	А				



SPECIAL PIECES

Skirting Board Rounded Edge

9.5cm x 59.7cm 9.5cm x 59.7cm Rectified 7.5cm x 89cm Rectified
















EXMOOR

TECHNICAL FEATURES

		Norm Standards	Test Results
	Product Classification	UNI EN 14411	Glazed Porcelain EN14411 Annexe G Group Bla
	Dimensional and surface quality	UNI EN ISO 10545-2	Very low tolerance
	Water absorption	UNE-EN-ISO 10545-3	< 0,1%
	Flexural strength	UNI EN ISO 10545-4	>35 N/mm2
	Frost resistance	UNI EN ISO 10545-12	Resistant
o T	Resistance to acids and alkalis (except hydrofluoric acid)	UNI EN ISO 10545-13	Resistant
	Wear and abrasion resistance	UNI EN ISO 10545-6	≤ 130 mm3
	Thermal shock resistance	UNI EN ISO 10545-9	Resistant
		DIN 51130	Matt R10 Anti-Slip R11
	Slip resistance	DIN 51097 PTV	Matt B Anti-Slip C Matt +36 Anti-Slip +36 +40
	Stain resistance	UNI EN ISO 10545-14	>= Classe 2

Waxman Ceramics Architectural Tiles

Head Office

01422 377123

Grove Mills Elland West Yorkshire HX5 9DZ England

Email info@waxmanarchitectural.co.uk Web www.waxmanarchitectural.co.uk

Waxman Ceramics Architectural Tiles is a division of Waxman Ceramics Ltd - Part of the Waxman Group

The information contained within this document is, to the best of our knowledge, accurate at the time of production. We reserve the right to modify this document at any time. Whilst every attempt has been made to accurately reproduce colours and textures, images used within this document are only intended as a guide. Please refer to actual product samples before specifying or ordering.