








KANSAS

KA Series glazed porcelain tile








KA-10 White

KA-31 Blanco






FORMATS

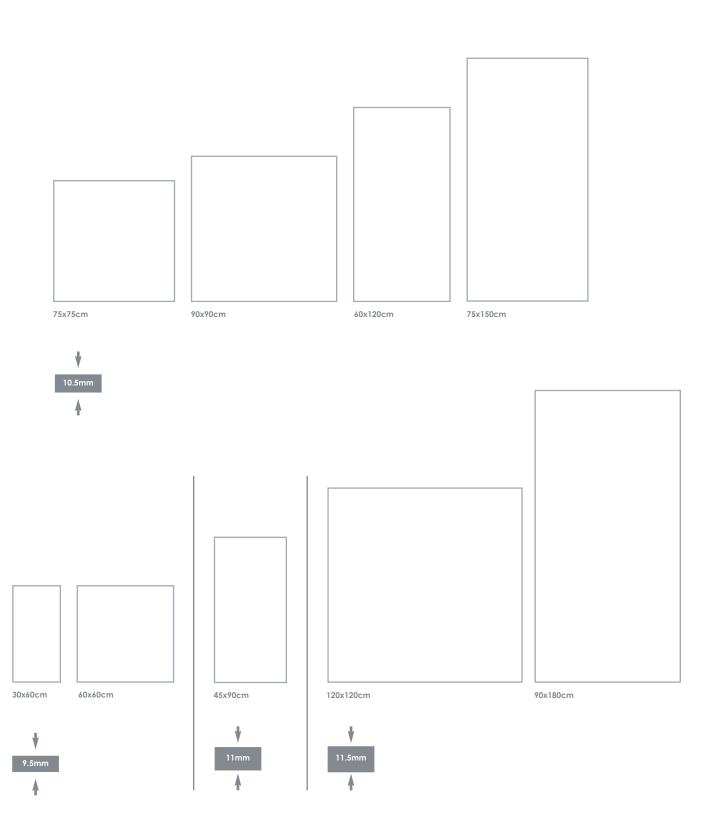




FTNTSHES

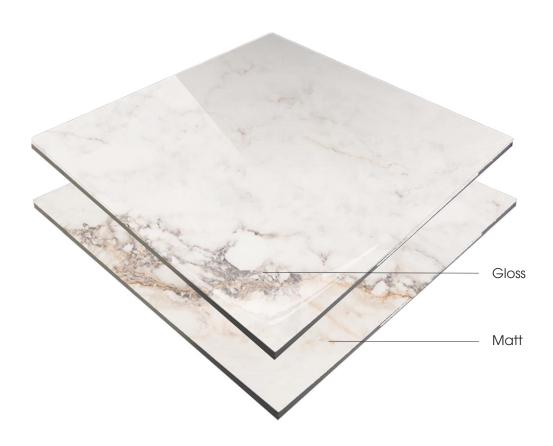





ST7FS

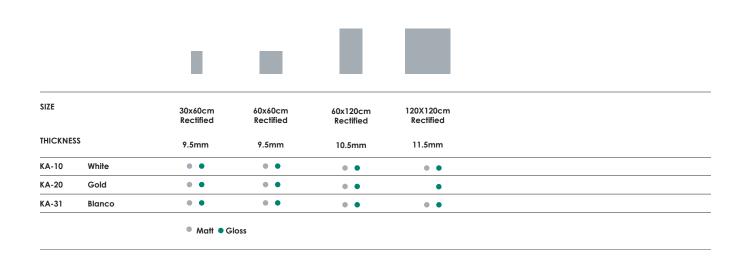

				i	į,		
SIZE		75x75cm Rectified	75x150cm Rectified	45x90cm Rectified	90x90cm Rectified	90x180cm Rectified	
THICKNES	S	10.5mm	10.5mm	11mm	10.5mm	11.5mm	
KA-10	White	• •	• •		• •		
KA-20	Gold	•		•	•	•	
KA-31	Blanco			• •	• •	• •	





KA-20 - Gold Gloss - 90 x 90cm





TECHNICAL FEATURES

	Norm Standards	Test results
Product Classification	UNI EN 14411-G ISO 13006	Group B1a GL fully vitrified
Dimensional and surface quality	UNI EN ISO 10545-2	Conforms to Standards
Water absorption	UNI EN ISO 10545-3	0,1%
Flexural strength	UNI EN ISO 10545-4	34 - 35 N/mm²
Frost resistance	All standards	Yes
Resistance to acids and alkalis (except hydrofluoric acid)	UNI EN ISO 10545-13	Conforms to Standards
Resistance to surface abrasian	UNI EN ISO 10545-7	4
Linear thermal expansion	UNI EN ISO 10545-8	<7,0 x 10-6 °c-1
Stain resistance	UNI EN ISO 10545-14	Conforms to Standard

Waxman Ceramics Architectural Tiles

Head Office

01422 377123

Grove Mills Elland West Yorkshire HX5 9DZ England

Email info@wax Web www.wax

info@waxmanarchitectural.co.uk www.waxmanarchitectural.co.uk

Waxman Ceramics Architectural Tiles is a division of Waxman Ceramics Ltd - Part of the Waxman Group