

ARCHITECTURAL COLLECTION

IR Series

IRIS

Porcelain Stoneware

EN14411 Annexe G - BI a

EPD 



WAXMAN CERAMICS
— Architectural Tiles —

TILE COLOURS

Porcelain Stoneware

14.8x4.8cm

IRIS



IR-300.L
Linen Light



IR-300.M
Linen Mid



IR-300.D
Linen Dark



IR-301.L
Alpi Light



IR-301.M
Alpi Mid



IR-301.D
Alpi Dark




IR-302.L
Amber Light



IR-302.M
Amber Mid



IR-302.D
Amber Dark

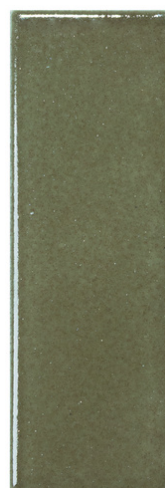

IR-303.L
Evergreen Light



IR-303.M
Evergreen Mid



IR-303.D
Evergreen Dark



IR-304.L
Midnight Light



IR-304.M
Midnight Mid



IR-304.D
Midnight Dark



IR-305.L
Saffron Light



IR-305.M
Saffron Mid



IR-305.D
Saffron Dark

TILE COLOURS

Porcelain Stoneware

14.8x4.8cm

Channel & Bord Décor


IRIS




IR-300.DC
Linen Dark Channel




IR-300.DB
Linen Dark Bord

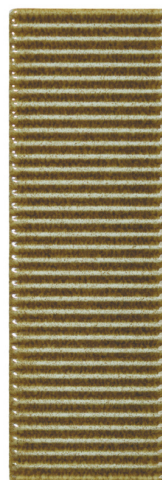

IR-301.DC
Alpi Dark Channel

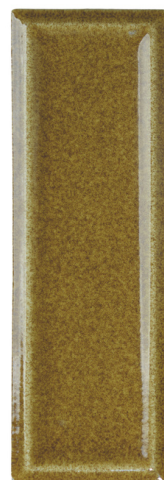


IR-301.DB
Alpi Dark Bord

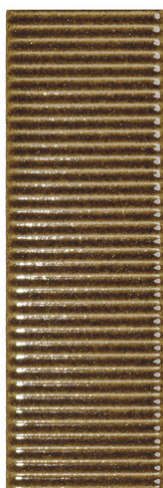

IR-302.DC
Amber Dark Channel



IR-302.DB
Amber Dark Bord

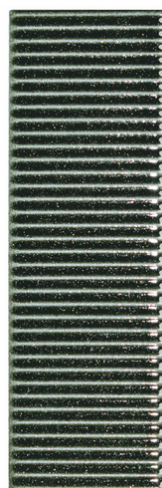

IR-303.DC
Evergreen Dark Channel




IR-303.DB
Evergreen Dark Bord



IR-304.DC
Midnight Dark Channel



IR-304.DB
Midnight Dark Bord

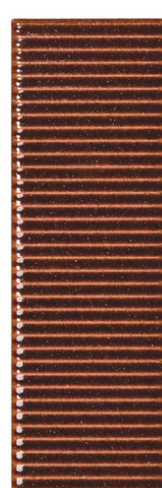

IR-305.DC
Saffron Dark Channel



IR-305.DB
Saffron Dark Bord



Iris Alpi Light
Iris Alpi Mid
Iris Alpi Dark
Iris Alpi Dark Bord



Iris Linen Light
Iris Linen Mid
Iris Linen Dark
Iris Linen Dark Bord
Iris Linen Dark Channel



Iris Midnight Mid
Iris Midnight Dark
Iris Midnight Dark Channel
Iris Linen Mid



Iris Saffron Light
Iris Saffron Mid
Iris Saffron Dark
Iris Evergreen Dark Channel

		Norm Standards	Test Results
	Product Classification	UNI EN 14411	Porcelain Stoneware EN14411 Annexe G Group BIa
	Dimensional and surface quality	UNI EN ISO 10545-2	48.0mm +/- 0.5mm x 148.0mm +/- 0.9mm
	Water absorption	UNE-EN-ISO 10545-3	<=0.5%
	Flexural strength	UNI EN ISO 10545-4	35N/mm2 1300N
	Frost resistance	UNI EN ISO 10545-12	Resistant
	Resistance to acids and alkalis (except hydrofluoric acid)	UNI EN ISO 10545-13	GA
	Wear and abrasion resistance	UNI EN ISO 10545-6	Not Apply
	Thermal shock resistance	UNI EN ISO 10545-9	Not Apply
	Colour resistance to sunlight exposure	DIN 51094	No change of colours
	Stain resistance	UNI EN ISO 10545-14	Class 5

Size	Thickness	Internal Walls	External Walls	Internal Floors	External Floors	Frostproof	Colour Variation	Packing				
								Pcs / Ctn	M² / Ctn	Kg / Ctn	Ctns / Pallet	M² / Pallet
14.8x4.8cm	8.5mm	•	•			Yes	V1	78	0.55	10.98	75	41.55
14.8x4.8cm (Channel)	8.5mm	•	•			Yes	V1	78	0.55	10.9	75	41.55
14.8x4.8cm (Bord)	8.5mm	•	•			Yes	V1	72	0.51	9.99	75	38.4



 01422 377123

 www.waxmanarchitectural.co.uk

 info@waxmanceramics.co.uk

 **Waxman Ceramics**
Grove Mills
Elland
West Yorkshire
HX5 9DZ

The information contained within this document is, to the best of our knowledge, accurate at the time of production.

We reserve the right to modify this document at any time.

Whilst every attempt has been made to accurately reproduce colours and textures, images used within this document are only intended as a guide.

Please refer to actual product samples before specifying or ordering.