

ARCHITECTURAL COLLECTION

SICILY

Porcelain Stoneware

EN14411 Annexe G - BI a

SC Series

EPD



WAXMAN CERAMICS

Architectural Tiles




SC-401
White




SC-402
Grey




SC-403
Beige




160x160cm



120x120cm




75x150cm




75x75cm



60x120cm



60x60cm



Natural		
Slip Resistance		
	R9	

Natural R10		
Slip Resistance		
	R10	

Structured & 20mm		
Slip Resistance		
	R11	+36
	C	+36

Dotted		
Slip Resistance		
	R9/R10	
	B	

Available Finishes
Natural - SC-40*.N
Natural R10 - SC-40*.NR
Structured - SC-40*.S
Dotted - SC-40*.D
20mm Structured - SC-40*.S20

*Finishes vary between sizes, see Size & Packaging page for more details



SC-401.MS
White




SC-402.MS
Grey



SC-403.MS
Beige

Natural

Slip Resistance		
	R9	
		



31x31cm







Sicily Beige Mosaic Sticks










SIZE & PACKAGING

Porcelain Stoneware

SICILY

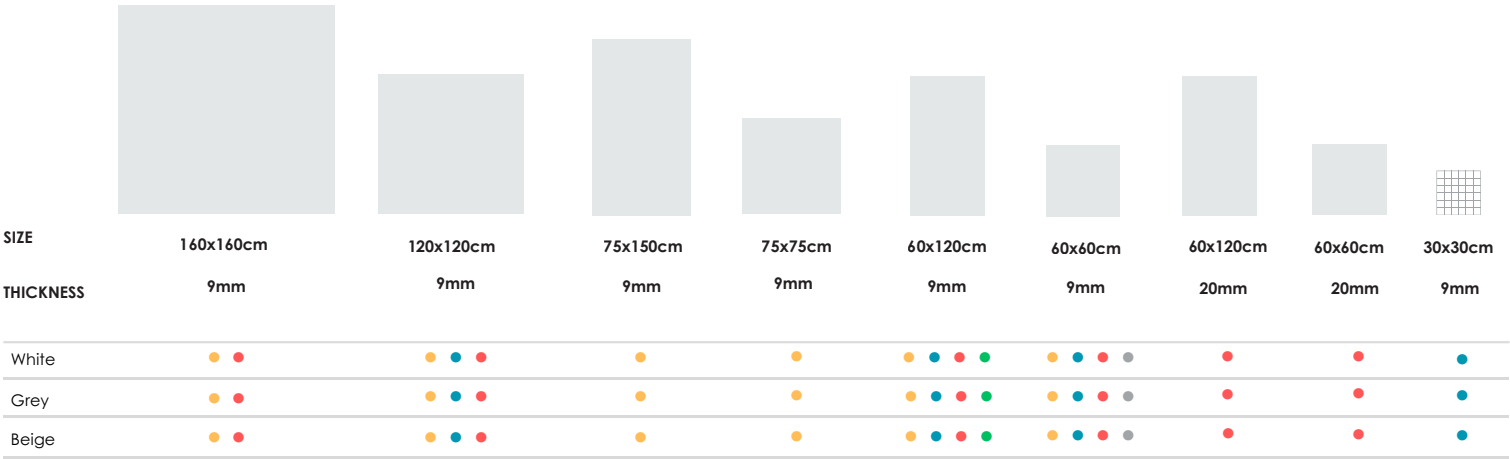

● Natural ● Natural R10 ● Structured ● Dotted R10 ● Dotted R9

Size	Thickness	Internal Walls	External Walls	Internal Floors	External Floors	Frostproof	Colour Variation	Packing				
								Pcs / Ctn	M² / Ctn	Kg / Ctn	Ctns / Pallet	M² / Pallet
60x60cm	9mm	•	•	•			V3	3	1.08	22.66	40	43.2
60x120cm	9mm	•	•	•			V3	2	1.44	30.59	36	51.84
120x120cm	9mm	•	•	•			V3	1	1.44	31.56	36	51.84
75x75cm	9mm	•	•	•			V3	2	1.13	23	42	47.46
75x150cm	9mm	•	•	•			V3	2	2.25	45	21	47.25
160x160cm	9mm	•	•	•			V3	1	2.56	51.23	18	46.08
60x60cm	20mm			•	•		V3	2	0.72	32.86	32	23.04
60x120cm	20mm			•	•		V3	1	0.72	32.51	36	25.92
Mosaic Stick (31x31cm)	9mm	•	•	•			V3	6	0.58	9.5	60	34.8

		Norm Standards	Test Results
	Product Classification	UNI EN 14411	Porcelain Stoneware EN14411 Annexe G Group BIa
	Dimensional and surface quality	UNI EN ISO 10545-2	Very Low Tolerance
	Water absorption	UNE-EN-ISO 10545-3	<0.5%
	Flexural strength	UNI EN ISO 10545-4	Complies
	Frost resistance	UNI EN ISO 10545-12	Resistant
	Resistance to acids and alkalis (except hydrofluoric acid)	UNI EN ISO 10545-13	A
	Wear and abrasion resistance	UNI EN ISO 10545-6	Resistant deep abrasion
	Thermal shock resistance	UNI EN ISO 10545-9	Not Apply
	Slip resistance	UNE 41901:2017 EX DIN 51130 DIN 51097 BS7976 (PTV) WET ANSI A326.3	Natural R9, Natural R10 R10, Structured & 20mm R11 C / PTV Shod & Barefoot +36 Dotted 60x60 R10 B / 60x120cm R9 B
	Colour resistance to sunlight exposure	DIN 51094	No change of colours
	Stain resistance	UNI EN ISO 10545-14	Class 4-5



 01422 377123

 www.waxmanarchitectural.co.uk

 info@waxmanceramics.co.uk

 **Waxman Ceramics**
Grove Mills
Elland
West Yorkshire
HX5 9DZ

The information contained within this document is, to the best of our knowledge, accurate at the time of production.

We reserve the right to modify this document at any time.

Whilst every attempt has been made to accurately reproduce colours and textures, images used within this document are only intended as a guide.
Please refer to actual product samples before specifying or ordering.