


ARCHITECTURAL COLLECTION

ETIVE

EV Series

Porcelain Stoneware
EN14411 Annexe G - BI a

EPD 

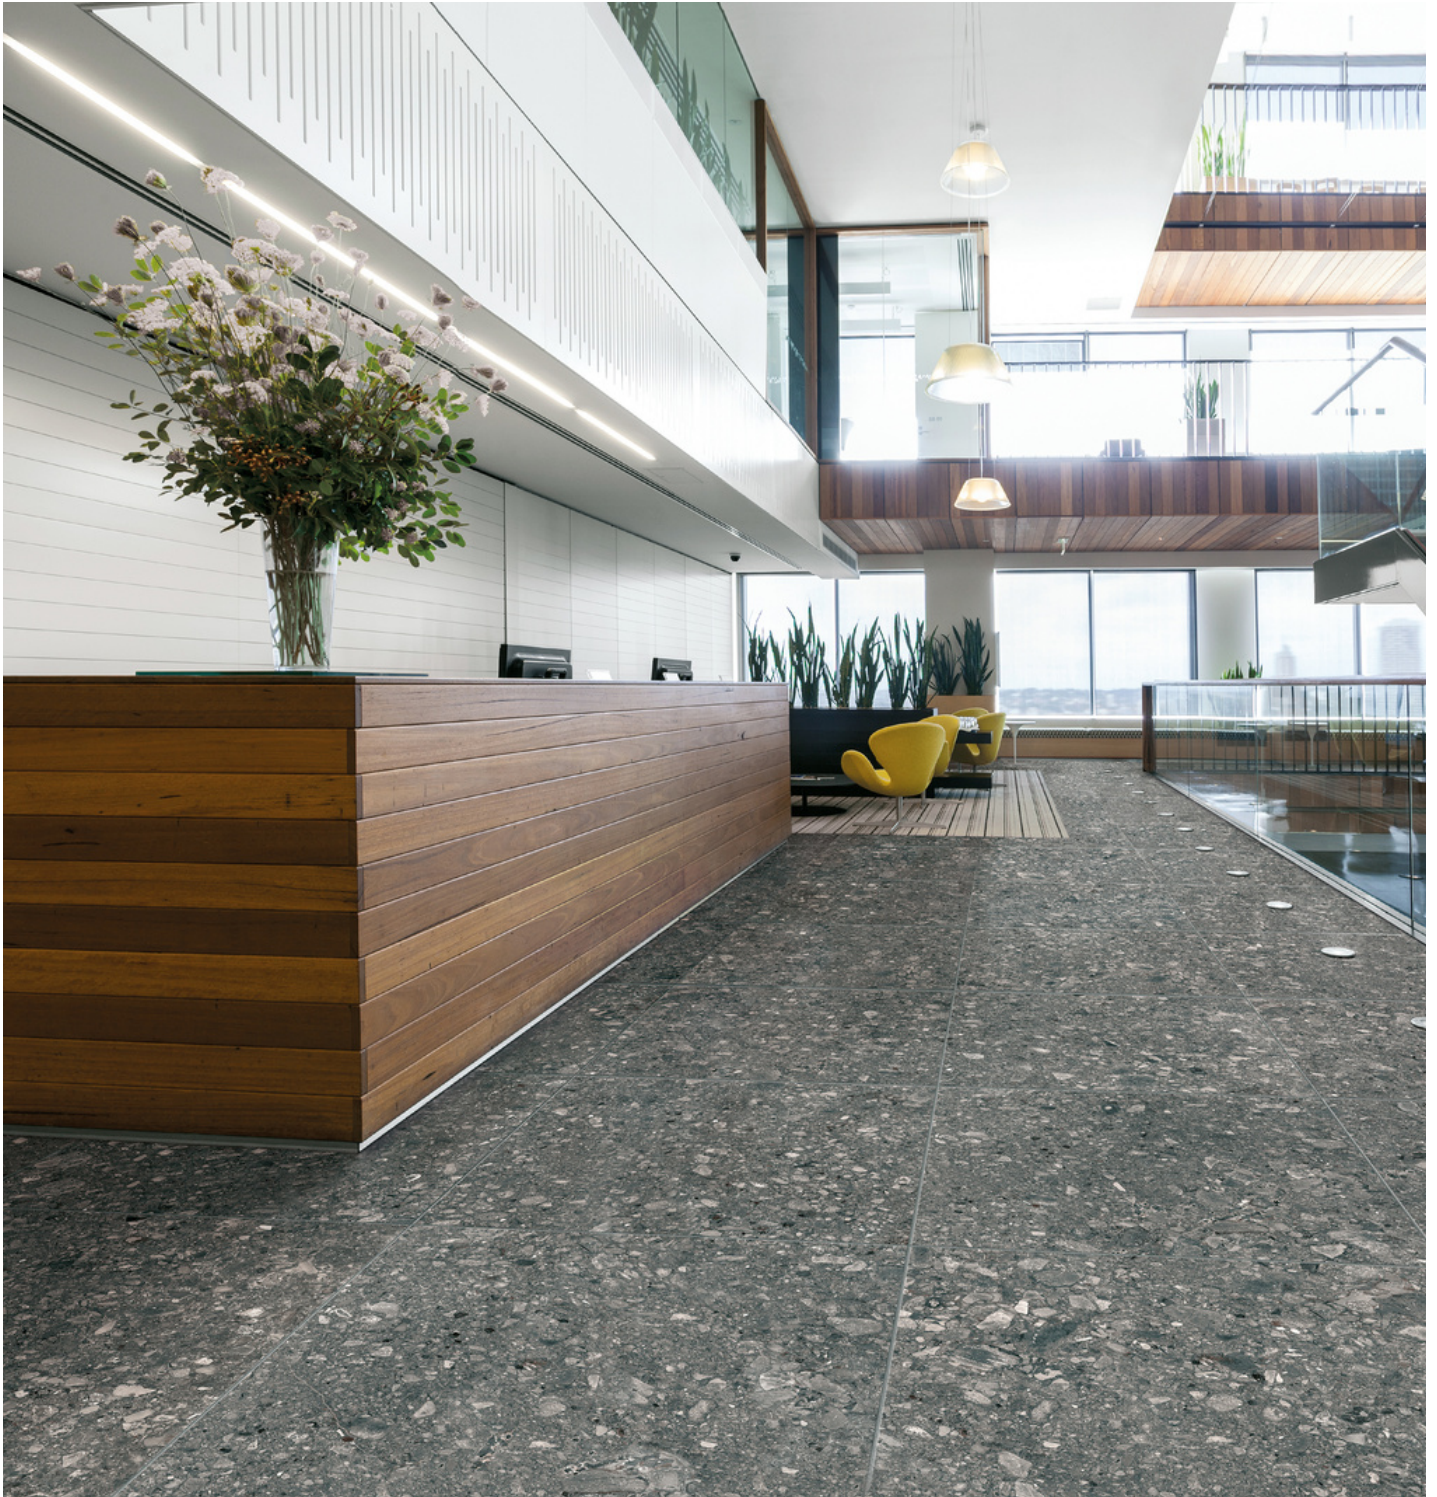



EV-326
Anthracite



EV-327
Grey



EV-328
White




EV-329
Coffee



EV-330
Taupe



EV-331
Beige



60x60cm



30x60cm



30x30cm



Slip Resistance		
	R10	+36









Etive Beige

		Norm Standards	Test Results
	Product Classification	UNI EN 14411	Porcelain Stoneware EN14411 Annexe G Group Bla
	Dimensional and surface quality	UNI EN ISO 10545-2	Very Low Tolerance
	Water absorption	UNE-EN-ISO 10545-3	<=0.5%
	Flexural strength	UNI EN ISO 10545-4	>=35N/mm2
	Frost resistance	UNI EN ISO 10545-12	Resistant
	Resistance to acids and alkalis (except hydrofluoric acid)	UNI EN ISO 10545-13	Not Apply
	Wear and abrasion resistance	UNI EN ISO 10545-6	132mm2
	Thermal shock resistance	UNI EN ISO 10545-9	Resist
	Slip resistance	UNE 41901:2017 EX DIN 51130 DIN 51097 BS7976 (PTV) WET ANSI A326.3	R10 PTV +36 Shod

Size	Thickness	Internal Walls	External Walls	Internal Floors	External Floors	Frostproof	Colour Variation	Packing				
								Pcs / Ctn	M² / Ctn	Kg / Ctn	Ctns / Pallet	M² / Pallet
30x30cm	8.5mm	•	•	•		Yes	V2	11	0.99	17.68	48	47.52
30x60cm	8.5mm	•	•	•		Yes	V2	11	1.26	22.5	48	60.48
60x60cm	8.5mm	•	•	•		Yes	V2	11	1.44	26	40	57.6



 01422 377123

 www.waxmanarchitectural.co.uk

 info@waxmanceramics.co.uk

 **Waxman Ceramics**
Grove Mills
Elland
West Yorkshire
HX5 9DZ

The information contained within this document is, to the best of our knowledge, accurate at the time of production.

We reserve the right to modify this document at any time.

Whilst every attempt has been made to accurately reproduce colours and textures, images used within this document are only intended as a guide.
Please refer to actual product samples before specifying or ordering.