

ARCHITECTURAL COLLECTION

LC Series

LUCA

Porcelain Stoneware

EN14411 Annexe G - BI a

EPD 



TILE COLOURS

Porcelain Stoneware

LUCA



LC-810
White




LC-811
Beige




LC-813
Greige




LC-814
Grey




120x278cm



120x120cm



100x100cm



60x120cm



60x60cm



30x60cm



Silktech

Slip Resistance		
	R10	+36

Silktech Plus

Slip Resistance		
	R11	+36

Available Finishes

Natural - LC-81*.N

Silktech - LC-81*.S

Silktech Plus - LC-81*.SP

*Please see Technical for available colours/sizes in each finish

TILE COLOURS

Porcelain Stoneware

LUCA



LC-814
White Stone




LC-815
Beige Stones




LC-816
Greige Stones




LC-817
Grey Stones




120x278cm




120x120cm



100x100cm



60x120cm



60x60cm



30x60cm



Silktech

Slip Resistance		
	R10	+36

Silktech Plus & 20mm

Slip Resistance		
	R11	+36

Available Finishes

Natural - LC-81*.N

Silktech - LC-81*.S

Silktech Plus - LC-81*.SP

Natural 20mm - LC-81*.N2

*Please see Technical for available colours/sizes in each finish

TILE COLOURS

Porcelain Stoneware

LUCA



LC-810.D
White Decor




LC-811.D
Beige Decor




LC-813.D
Greige Decor



LC-814.D
Grey Decor



60x120cm





Luca Grey
Luca Grey Stones



Luca Grey Decor





Luca Beige Stones














Luca Beige
Luca Beige Stones



Luca White Stones




Luca White Stone
Luca Grey Decor

		Norm Standards	Test Results
	Product Classification	UNI EN 14411	Porcelain Stoneware EN14411 Annexe G Group Bla
	Dimensional and surface quality	UNI EN ISO 10545-2	Complies
	Water absorption	UNE-EN-ISO 10545-3	<=0.5%
	Flexural strength	UNI EN ISO 10545-4	6mm >=700N 9mm >=2000N 20mm >=12000N
	Frost resistance	UNI EN ISO 10545-12	Resistant
	Resistance to acids and alkalis (except hydrofluoric acid)	UNI EN ISO 10545-13	A - LA - HA
	Wear and abrasion resistance	UNI EN ISO 10545-6	Not Apply
	Thermal shock resistance	UNI EN ISO 10545-9	Not Apply
	Slip resistance	UNE 41901:2017 EX DIN 51130 DIN 51097 BS7976 (PTV) WET ANSI A326.3	Natural: R10 Silktech: R10 / PTV Shod 36+ Silktech Plus & 20mm: R11 / PTV Shod 36+
	Colour resistance to sunlight exposure	DIN 51094	No change of colours
	Stain resistance	UNI EN ISO 10545-14	Class 5

TECHNICAL & PACKAGING

Porcelain Stoneware

LUCA

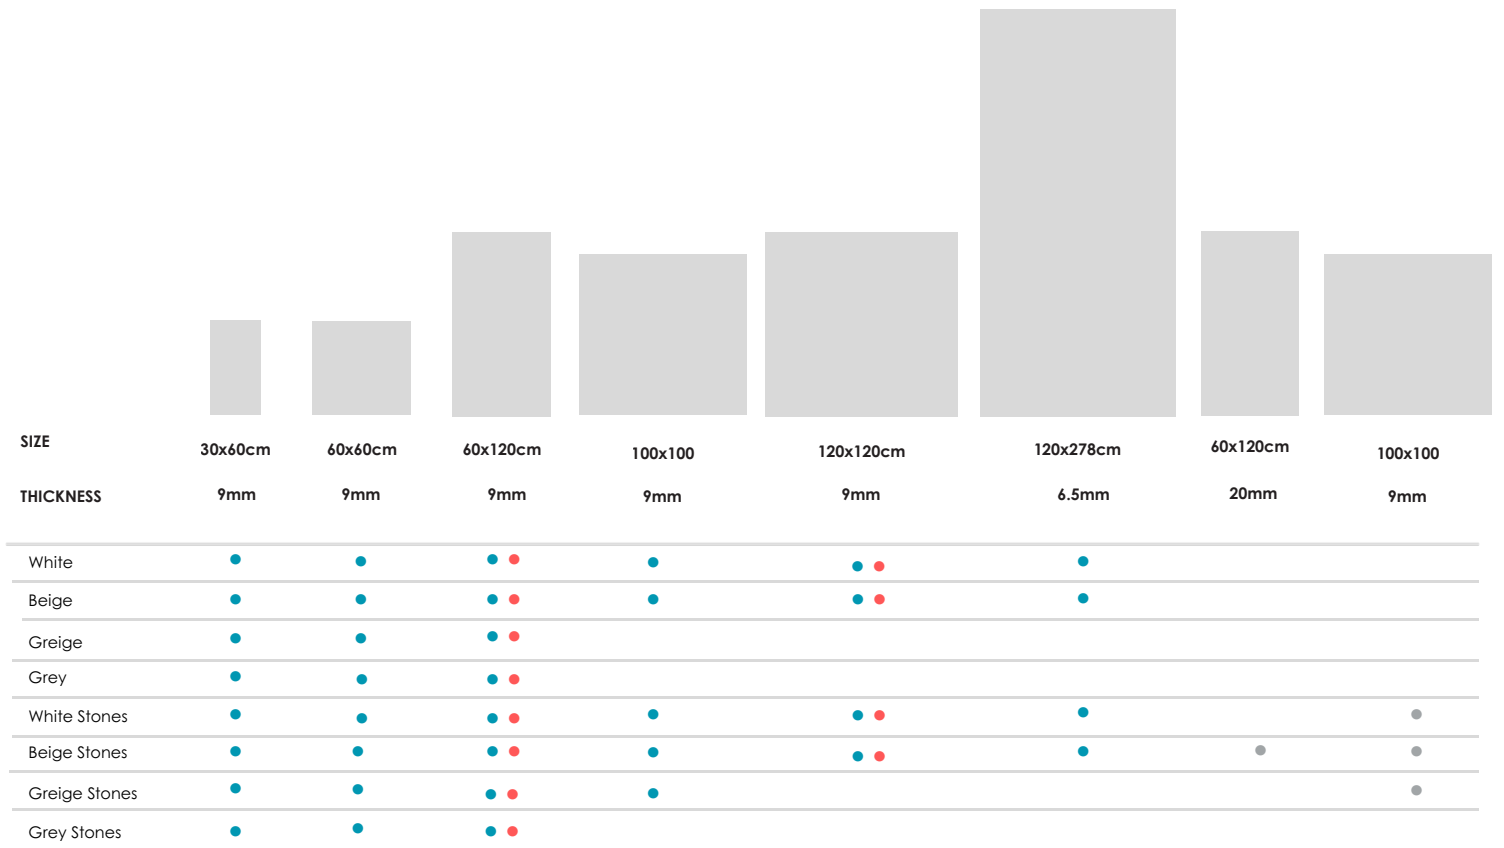

● Natural R10 ● Silktech R10 ● Siltech Plus R10 ● Natural R11


Size	Thickness	Internal Walls	External Walls	Internal Floors	External Floors	Frostproof	Colour Variation	Packing				
								Pcs / Ctn	M ² / Ctn	Kg / Ctn	Ctns / Pallet	M ² / Pallet
120x278cm	6.5mm	•	•	•		Yes	V3	1	3.34	50.04		
120x120cm	9mm	•	•	•		Yes	V3	1	1.44	30.24	36	51.84
60x120cm	9mm	•	•	•		Yes	V3	2	1.44	30.24	36	51.84
100x100cm	9mm	•	•	•		Yes	V3	2	2	42	24	48
60x60cm	9mm	•	•	•		Yes	V3	3	1.08	22.68	40	43.2
30x60cm	9mm	•	•	•		Yes	V3	6	1.08	22.68	48	51.84
60x120cm	20mm			•	•	Yes	V3	1	0.72	33.12	36	25.92
100x100cm	20mm			•	•	Yes	V3	1	1	46	21	21
60x120cm (Decor)	9mm	•	•	•		Yes	V3	2	1.44	30.24	36	51.84



 01422 377123

 www.waxmanarchitectural.co.uk

 info@waxmanceramics.co.uk

 **Waxman Ceramics**
Grove Mills
Elland
West Yorkshire
HX5 9DZ

The information contained within this document is, to the best of our knowledge, accurate at the time of production.
We reserve the right to modify this document at any time.
Whilst every attempt has been made to accurately reproduce colours and textures, images used within this document are only intended as a guide.
Please refer to actual product samples before specifying or ordering.